

SEALED TOGGLE SWITCHES

T71
SEALED
TOGGLES

NARROW SINGLE POLE TOGGLE FOR USE WHERE SPACE IS LIMITED


The T71 toggle is ~35 percent narrower than OTTO's T7 toggle making it a great alternative for use in rugged, high-demanding applications where space is limited.

Sealed to both IP68S and IP69K, the thinner T71 series is available in single pole single throw (SPST) and single pole double throw (SPDT) configurations. High contact pressure and superior contact wiping action of the OTTO design makes the T71 an excellent choice for switching loads from logic level up to 16 amps. These toggles feature positive detent action for safe switching operation. In conjunction with the unique OTTO snap-action switch mechanism, the T71 offers non-teasible contact transfer.

Designed for tight spaces in control panels and grips, the T71 can be used under severe conditions found in heavy equipment, industrial control, marine and appliance applications.

Features:

- Thin version of OTTO's T7 toggle
- Single pole only
- Sealed to IP68S and IP69K
- Switches logic level up to 16 amps
- Withstands extreme shock & vibration
- Positive detent, non-teasible contact transfer
- 2 & 3 position, momentary & maintained action
- Choice of terminal styles
- RoHS compliant
- Black matte finish available (contact factory)

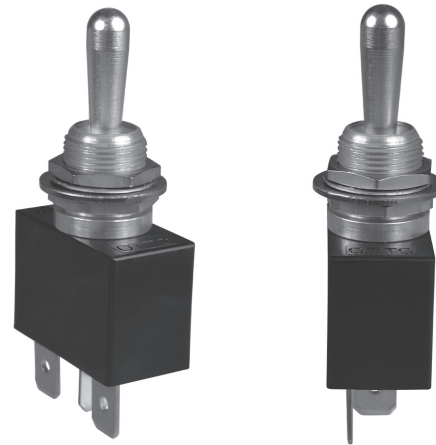

Standard Characteristics/Ratings:

ELECTRICAL RATINGS:

Load	Sea Level @ 28VDC	Sea Level @ 125VAC 60/400 Hz	Cycles
Resistive	16A	5A	25,000
Resistive	10A	N/A	50,000
Inductive	7A	2A	25,000
DWV	1000Vrms	1000Vrms	1000Vrms
Logic Level	10mA @ 5VDC	N/A	50,000

Electrical Life: See Rating Chart

Mechanical Life: 100,000 cycles

Seal: IP68S and IP69K

Operating Temp Range: -30°C to +85°C

MATERIALS:

Case: Thermoplastic

Bushing: Anodized aluminum alloy

Toggle: Stainless steel

Contacts: Fine silver/silver cadmium oxide

Logic Level Contacts: Gold over silver

Mounting Hardware: Hex nuts, lockwasher, keyway washer

Your official representative



ALDERS
Indicate. Control. Connect.

ALDERS electronic GmbH
Arnoldstraße 19
47906 Kempen - Germany
+49 2152 8955-0
sales@alders.de / www.alders.de

T71 PART NUMBER CODE

T71 –	X	X	X	X	X	*		
Circuitry	Terminal Style	Contact Rating	Circuit Made With Toggle At:				Toggle Style	Not Used
1. 1 Pole	1. .250" Q.C. 2. Screw 3. Solder 4. PC Pin (consult factory)	1. Std. 2. Logic Level	Keyway Side	Center	Opposite Keyway	Circuit	1. Bat Handle	Leave Blank
			A. ON	NONE	OFF	SPST		
			B. ON	NONE	ON	SPDT		
			C. (ON)	NONE	OFF	SPST		
			D. (ON)	NONE	ON	SPDT		
			E. (ON)	OFF	(ON)	SPDT		
			F. ON	OFF	ON	SPDT		
			G. (ON)	OFF	ON	SPDT		
			H. OFF	NONE	ON	SPST		
			J. OFF	NONE	(ON)	SPST		
			K. ON	OFF	(ON)	SPDT		

T71 Cor

P/N C405

NOTE: () denotes momentary action.

T71 Connector
P/N C405041-XXXXXX

DESIGNED FOR TIGHT SPACES AND SEVERE CONDITIONS

