

MOMENTARY ACTION, ATTRACTIVE &amp; RUGGED FOR WET &amp; DUSTY ENVIRONMENTS

The P7-D pushbutton is a double break, momentary switch with a contoured dome style round or square pushbutton. Button versions include flush or raised round in glossy finish and raised square in matte finish. The P7-D features a shorter behind panel depth, dusttight and moistureproof sealed construction, and an excellent mechanical and electrical performance while operating under the most severe conditions. Its cycle life is 2 million operations at logic level and 50,000 at full rated load of 5 amps resistive or 3 amps inductive.

The P7-D's positive tactile feedback signals the operator when the switch is operated. Multiple contact variations are available as well as a variety of special order button legends. The high contact pressure and unique contact design provides low contact resistance for logic level switching capability as well as full rated service.

This quality precision snap-action switch is designed for use in instrument panels, grips, computers, heavy equipment and other applications where attractive rugged pushbutton switches are required.

## Features:

- Flush or raised round button in glossy finish and raised square button in matte finish available in a variety of colors
- Logic level switching capability
- High contact pressure
- 6 circuit variations
- Positive tactile feedback
- Variety of mounting styles
- Constructed in accordance with MIL-PRF-8805/110 (no QPL)
- Mechanical life is 2 million cycles
- UL recognized
- Dusttight to IP64 & MIL-PRF-8805 Design 2, or watertight to IP68S
- RoHS compliant

Raised Dome Button



Flush Dome Button



Raised Matte Square Button



### Standard Characteristics/Ratings:

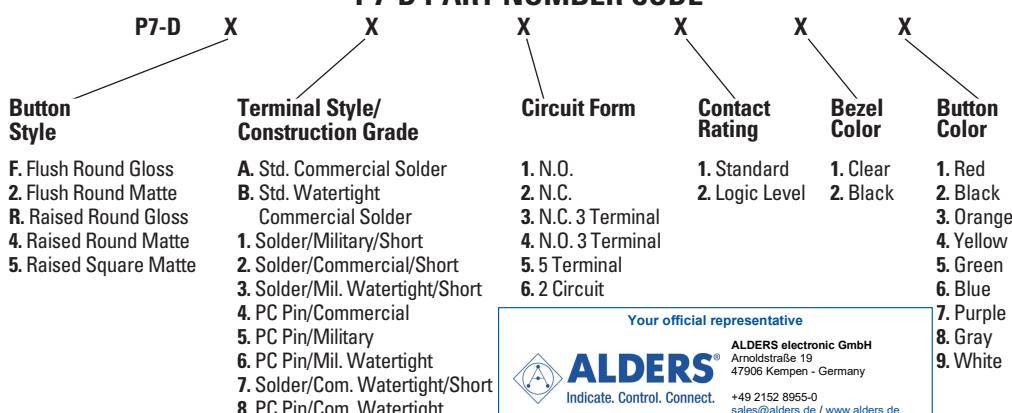
ELECTRICAL RATINGS: Sea Level @ 28VDC or 115VAC, 60/400Hz		
Load	N.O./N.C.	Life Cycles
Resistive	1A	50,000
Resistive	5A	50,000
Inductive	3A	50,000
DWV	1050Vrms	
Logic Level	10mA @ 5VDC	2,000,000

Electrical Life:	See Rating Chart
Mechanical Life:	2,000,000 cycles
Seal:	IP64, MIL-PRF-8805 Design 2, IP68S or MIL-PRF-8805 Design 3
Operating Temp Range:	-55°C to +85°C
Operating Force:	1.7 +/- 0.5 lb. (standard force)
Total Travel:	0.080 inches max

### MATERIALS:

Case:	Anodized aluminum alloy
Button:	Thermoplastic
Contacts:	Brass with gold over silver
Terminal Hardware:	None provided
Mounting Hardware:	Hex nut, lockwasher and panel seal on watertight versions

### P7-D PART NUMBER CODE



Your official representative



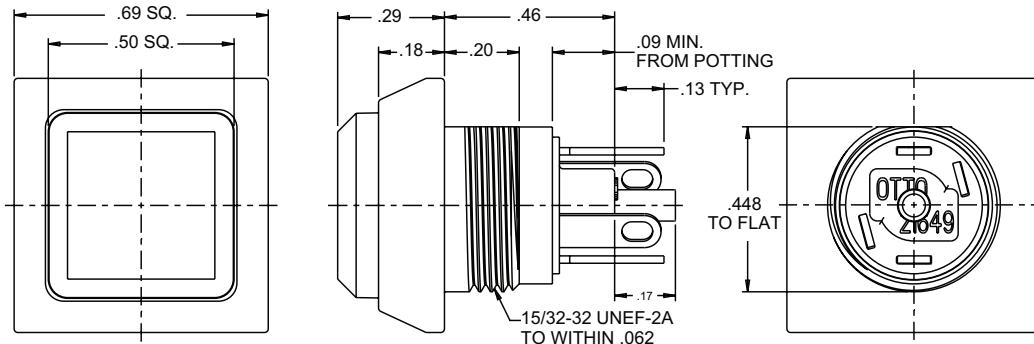
**ALDERS**<sup>®</sup>  
Indicate. Control. Connect.

ALDERS electronic GmbH  
Arnoldstraße 19  
47906 Kempen - Germany  
+49 2152 8955-0  
[sales@alders.de](mailto:sales@alders.de) / [www.alders.de](http://www.alders.de)

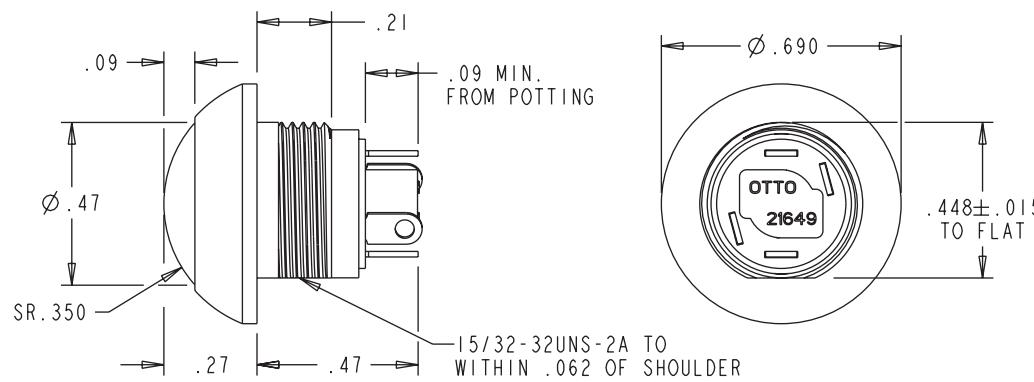
## SEALED DOME PUSHBUTTONS

MOMENTARY ACTION, ATTRACTIVE &amp; RUGGED FOR WET &amp; DUSTY ENVIRONMENTS

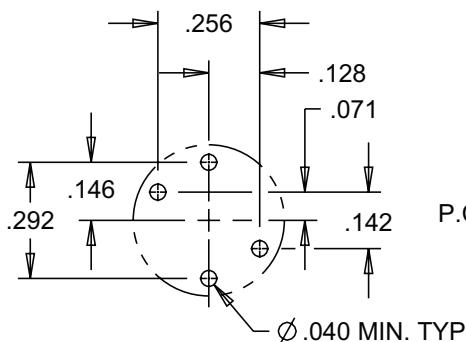

## P7-D5A Series

**Commercial Grade**  
**Solder Terminals**  
**Square Button**

## P7-DF1 Series

**Military Grade**  
**Short Solder Terminals**  
**Round Flush Button**

## P7-DR6 Series

**Military Grade**  
**P.C. Pin Terminals**  
**Round Raised Button**COMPONENT SIDE  
P.C. MOUNTING PATTERNTERMINAL DETAIL  
SCALE: 1:1